



## General Description


AFC2519W, N & P Pair enhancement mode MOSFET, uses Advanced Trench Technology to provide excellent  $R_{DS(ON)}$ , low gate charge.

These devices are particularly suited for low voltage power management, and low in-line power loss are needed in commercial industrial surface mount applications.


## Features

- N-Channel  
 $I_D=4.5A, R_{DS(on)}=38m\Omega@V_{GS}=4.5V$   
 $I_D=3.6A, R_{DS(on)}=48m\Omega@V_{GS}=2.5V$   
 $I_D=2.4A, R_{DS(on)}=68m\Omega@V_{GS}=1.8V$
- P-Channel  
 $I_D=-4.5A, R_{DS(on)}=80m\Omega@V_{GS}=-4.5V$   
 $I_D=-3.8A, R_{DS(on)}=105m\Omega@V_{GS}=-2.5V$   
 $I_D=-2.5A, R_{DS(on)}=145m\Omega@V_{GS}=-1.8V$
- Super high density cell design for extremely low  $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- DFN2X2-6L package design


## Pin Description ( DFN2X2-6L )




BOTTOM VIEW



n-channel



p-channel



TOP VIEW

## Application

- Power Management in Note book
- Portable Equipment
- Battery Powered System
- DC/DC Converter
- Load Switch
- DSC
- LCD Display inverter



**Pin Define**

Pin	Symbol	Description
1	S1	Source1
2	G1	Gate1
3	D2	Drain2
4	S2	Source2
5	G2	Gate2
6	D1	Drain1

**Ordering Information**

Part Ordering No.	Part Marking	Package	Unit	Quantity
AFC2519WFN226RG	W19YW	DFN2X2-6L	Tape & Reel	4000 EA

- ※ W19 parts code
- ※ Y year code
- ※ W week code
- ※ AFC2519WFN226RG : 7" Tape & Reel ; Pb- Free ; Halogen –Free

**Absolute Maximum Ratings**

(T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Symbol	Value		Unit	
		N-Channel	P-Channel		
Drain-Source Voltage	V <sub>DSS</sub>	20	-20	V	
Gate –Source Voltage	V <sub>GSS</sub>	±12	±12	V	
Continuous Drain Current(T <sub>J</sub> =150°C)	I <sub>D</sub>	T <sub>A</sub> =25°C	4.5	-4.5	A
		T <sub>A</sub> =70°C	2.4	-2.4	
Pulsed Drain Current	I <sub>DM</sub>	15	-15	A	
Continuous Source Current(Diode Conduction)	I <sub>S</sub>	1.5	-1.5	A	
Power Dissipation	P <sub>D</sub>	T <sub>A</sub> =25°C	1.9	W	
		T <sub>A</sub> =70°C	1.2		
Operating Junction Temperature	T <sub>J</sub>	150		°C	
Storage Temperature Range	T <sub>STG</sub>	-55/150		°C	
Thermal Resistance-Junction to Ambient	R <sub>θJA</sub>	65		°C/W	



**Electrical Characteristics ( N-Channel )**

(T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	20			V
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA	0.3		0.8	
Gate Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±12V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =16V, V <sub>GS</sub> =0V			1	uA
		V <sub>DS</sub> =16V, V <sub>GS</sub> =0V T <sub>J</sub> =85°C			10	
On-State Drain Current	I <sub>D(on)</sub>	V <sub>DS</sub> ≥ 5V, V <sub>GS</sub> =4.5V	6			A
		V <sub>DS</sub> ≥ 5V, V <sub>GS</sub> =2.5V	4			
Drain-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> =4.5V, I <sub>D</sub> =4.5A		28	38	mΩ
		V <sub>GS</sub> =2.5V, I <sub>D</sub> =3.6A		35	48	
		V <sub>GS</sub> =1.8V, I <sub>D</sub> =2.4A		50	68	
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =5V, I <sub>D</sub> =3.6A		10		S
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =1.6A, V <sub>GS</sub> =0V		0.85	1.2	V
<b>Dynamic</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> =4.5V I <sub>D</sub> ≧3.6A		4.2	5.0	nC
Gate-Source Charge	Q <sub>gs</sub>			0.6		
Gate-Drain Charge	Q <sub>gd</sub>			0.4		
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> =0V f=1MHz		340		pF
Output Capacitance	C <sub>oss</sub>			115		
Reverse Transfer Capacitance	C <sub>rss</sub>			33		
Turn-On Time	t <sub>d(on)</sub>	V <sub>DD</sub> =10V, R <sub>L</sub> =2.8Ω I <sub>D</sub> ≧3.6A, V <sub>GEN</sub> =4.5V		8	15	ns
	t <sub>r</sub>			8	15	
Turn-Off Time	t <sub>d(off)</sub>	R <sub>G</sub> =1Ω		25	40	
	t <sub>f</sub>			8	15	









### Electrical Characteristics ( P-Channel )

(T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =-250uA	-20			V
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250uA	-0.3		-0.8	
Gate Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±12V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =-16V, V <sub>GS</sub> =0V			-1	uA
		V <sub>DS</sub> =-16V, V <sub>GS</sub> =0V T <sub>J</sub> =85°C			-30	
On-State Drain Current	I <sub>D(on)</sub>	V <sub>DS</sub> ≤ -5V, V <sub>GS</sub> =-4.5V	-8			A
		V <sub>DS</sub> ≤ -5V, V <sub>GS</sub> =-2.5V	-3			
Drain-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-4.5A		60	80	mΩ
		V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-3.8A		80	105	
		V <sub>GS</sub> =-1.8V, I <sub>D</sub> =-2.5A		115	145	
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =-5V, I <sub>D</sub> =-2.8A		6.5		S
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =-1.25A, V <sub>GS</sub> =0V		-0.75	-1.3	V
<b>Dynamic</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =-10V, V <sub>GS</sub> =-4.5V I <sub>D</sub> ≡-3.5A		5	10	nC
Gate-Source Charge	Q <sub>gs</sub>			0.85		
Gate-Drain Charge	Q <sub>gd</sub>			1.5		
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =-10V, V <sub>GS</sub> =0V f=1MHz		375		pF
Output Capacitance	C <sub>oss</sub>			80		
Reverse Transfer Capacitance	C <sub>rss</sub>			60		
Turn-On Time	t <sub>d(on)</sub>	V <sub>DD</sub> =-10V, R <sub>L</sub> =2.85Ω I <sub>D</sub> ≡-3.5A, V <sub>GEN</sub> =-4.5V R <sub>G</sub> =1Ω		15	25	ns
	t <sub>r</sub>			36	60	
Turn-Off Time	t <sub>d(off)</sub>			25	50	
	t <sub>f</sub>			15	25	








## Typical Characteristics ( N-Channel )

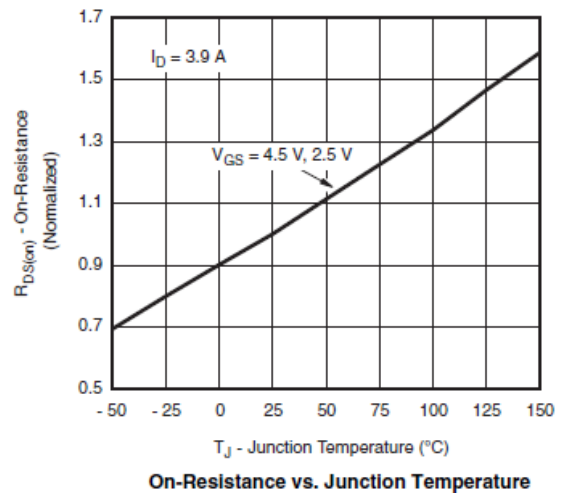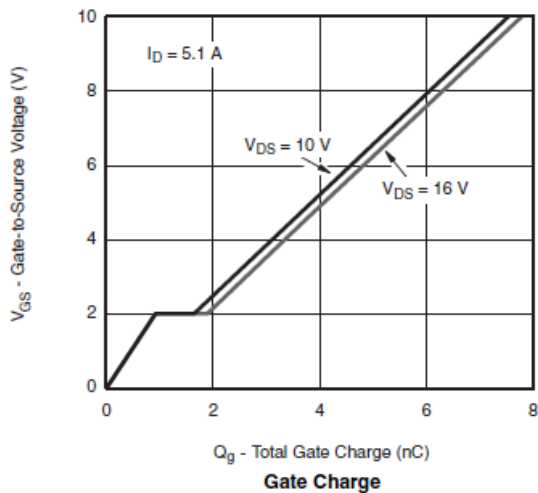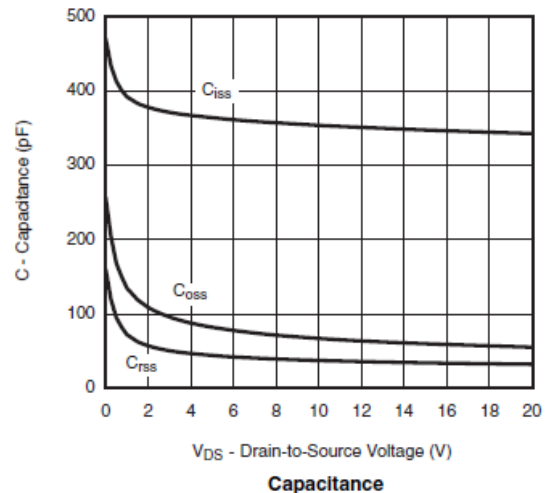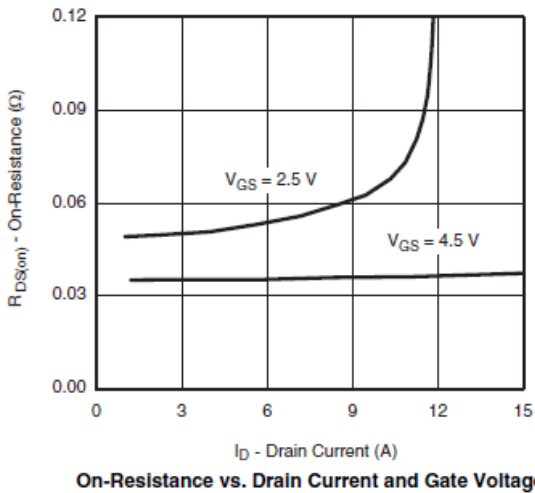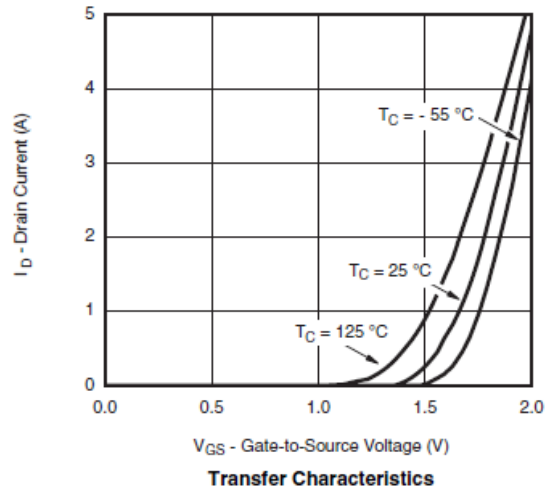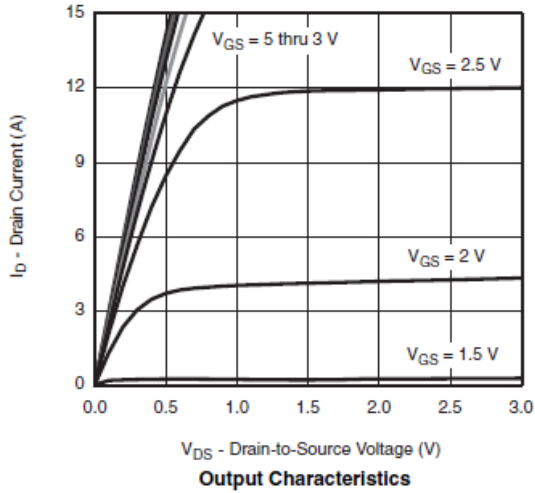




## Typical Characteristics ( N-Channel )

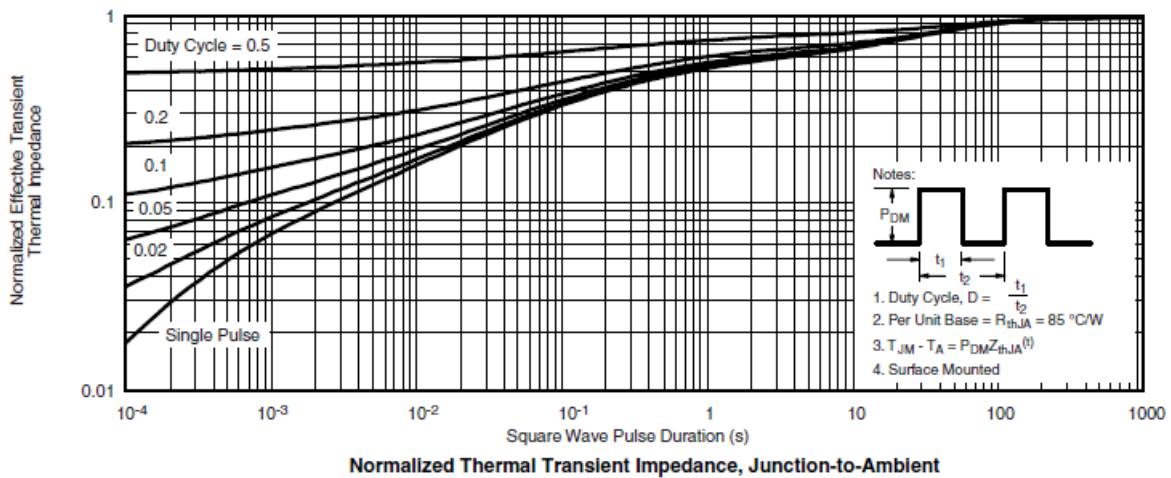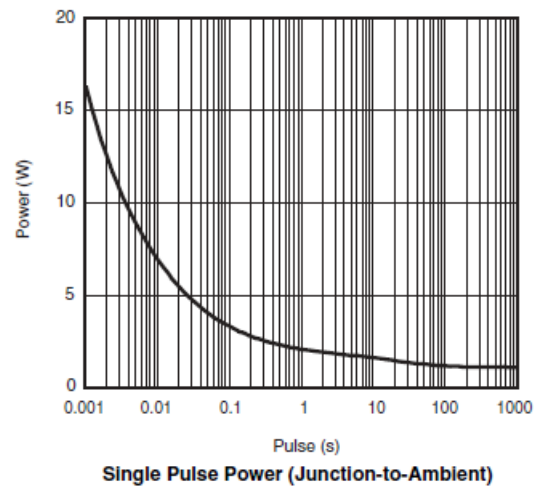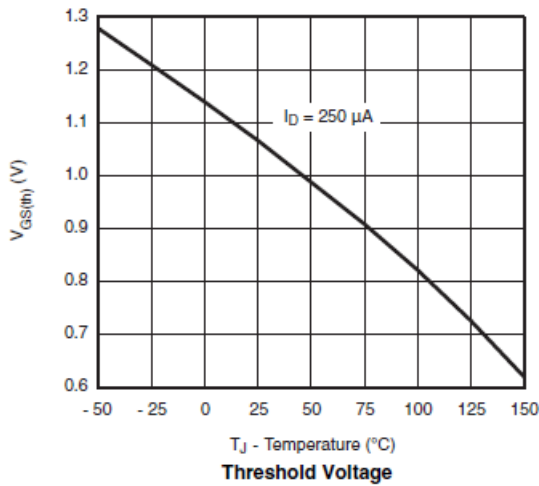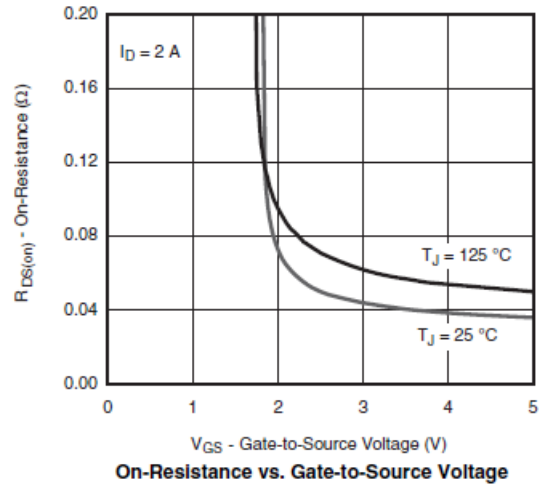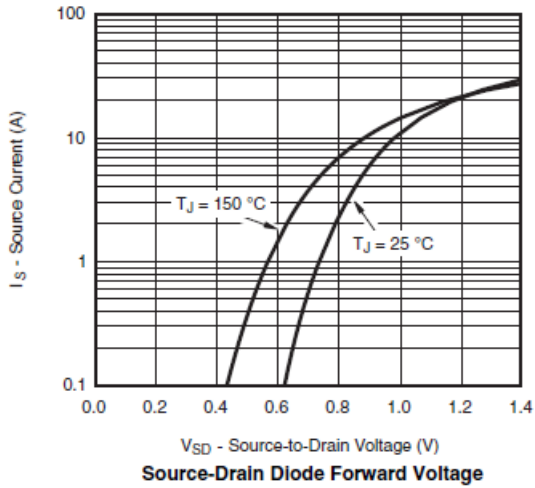




**Typical Characteristics ( N-Channel )**


Gate Charge Test Circuit & Waveform

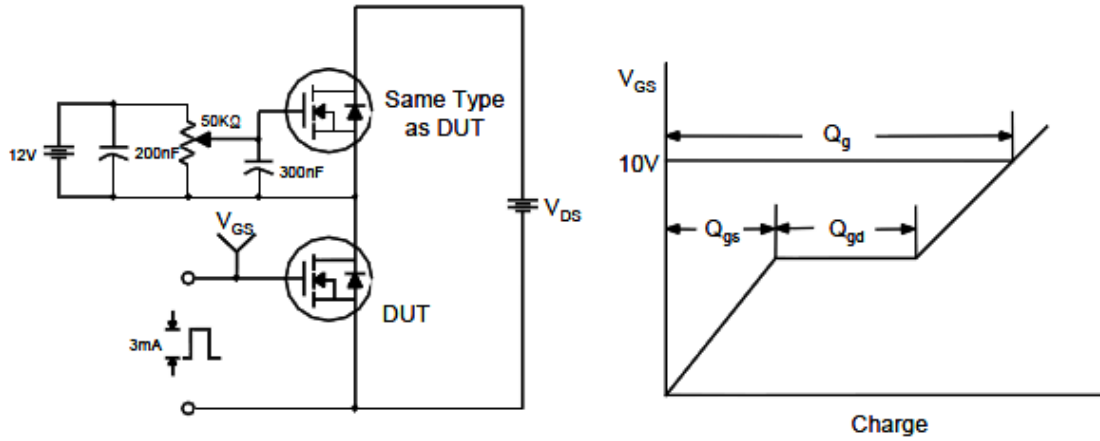

Resistive Switching Test Circuit & Waveforms

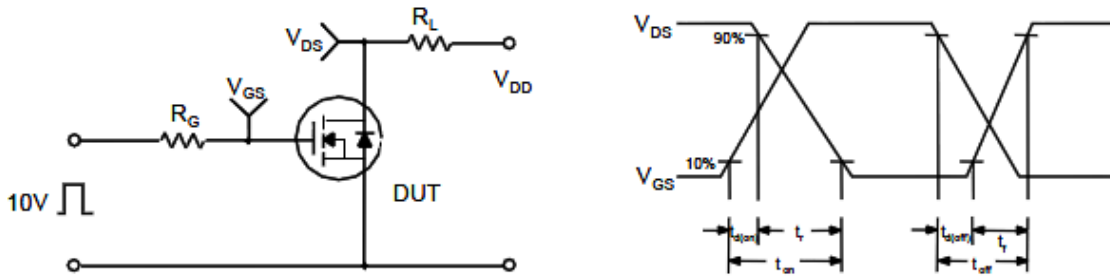


Unclamped Inductive Switching Test Circuit & Waveforms

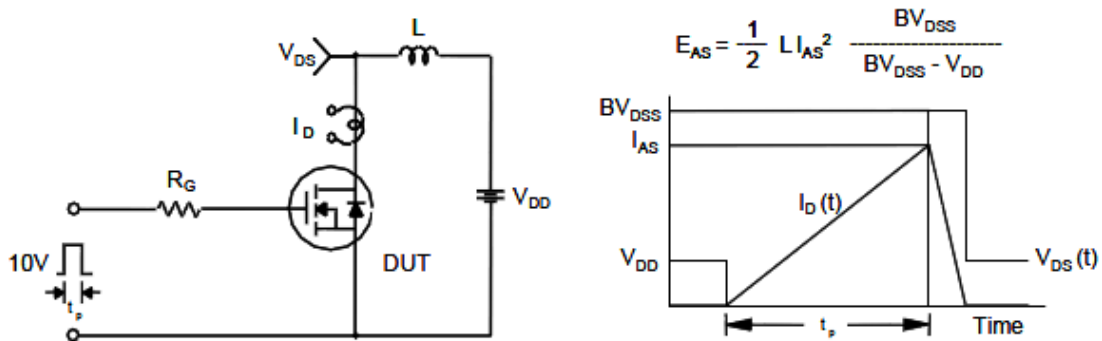





## Typical Characteristics ( P-Channel )

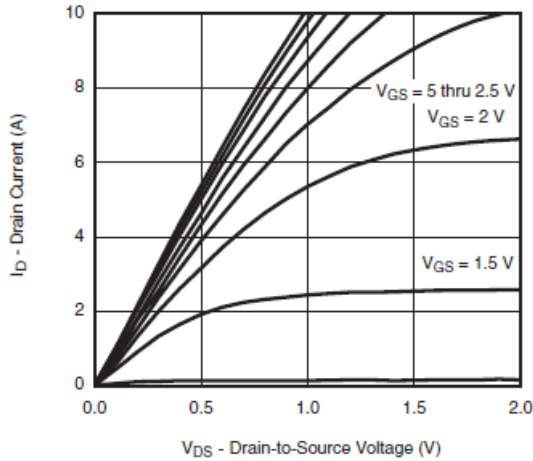


**Output Characteristics**

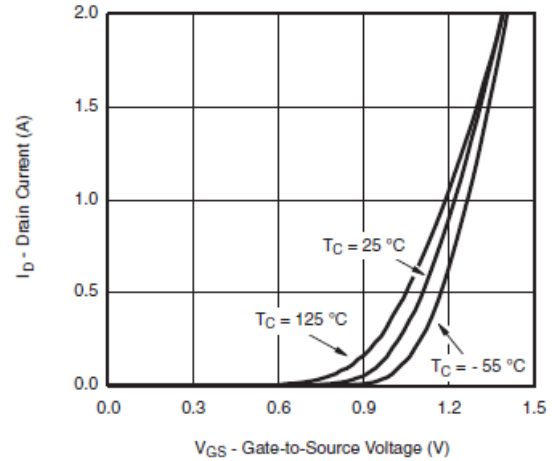


**Transfer Characteristics**

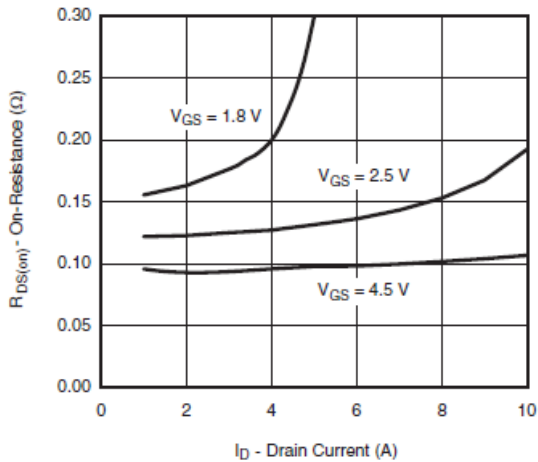


**On-Resistance vs. Drain Current and Gate Voltage**

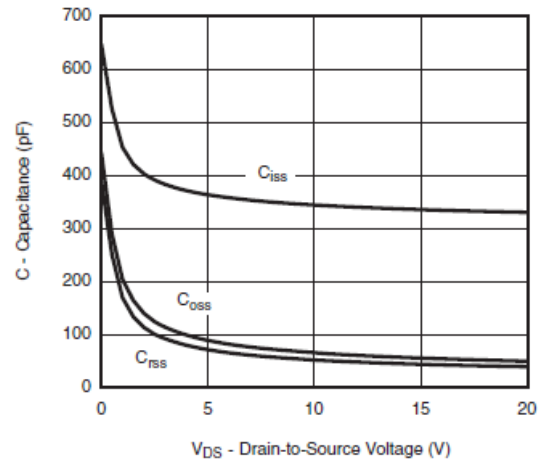

**Capacitance**

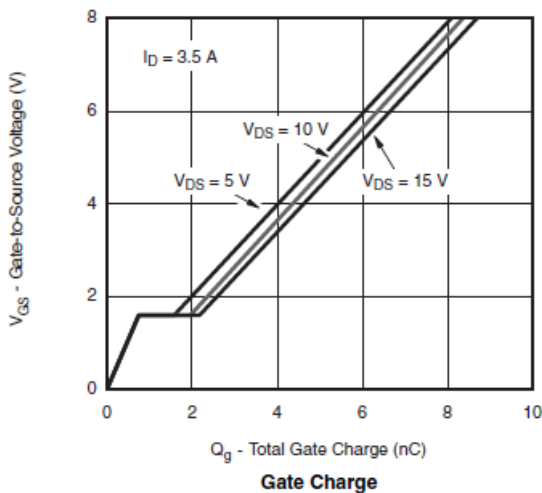

**Gate Charge**

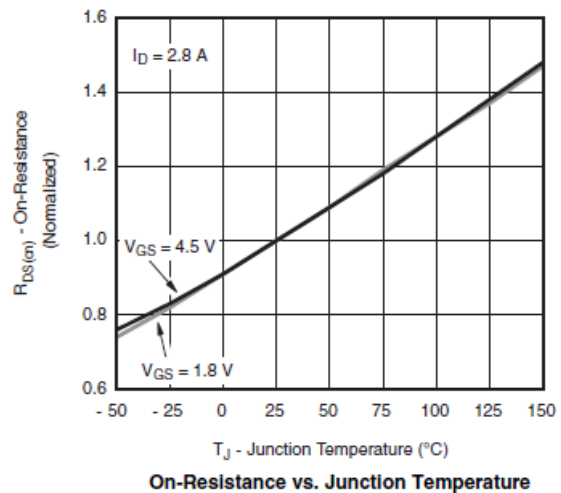


**On-Resistance vs. Junction Temperature**







**Typical Characteristics ( P-Channel )**

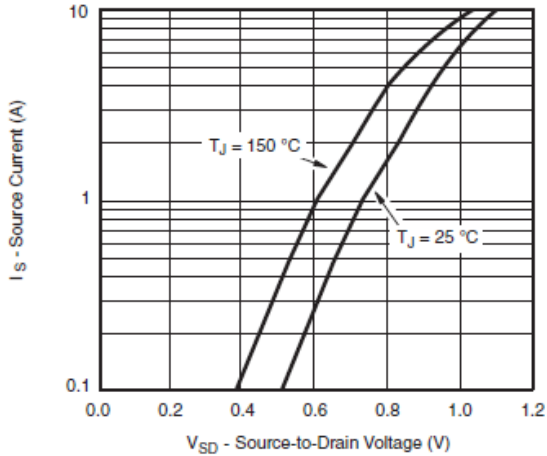


**Source-Drain Diode Forward Voltage**

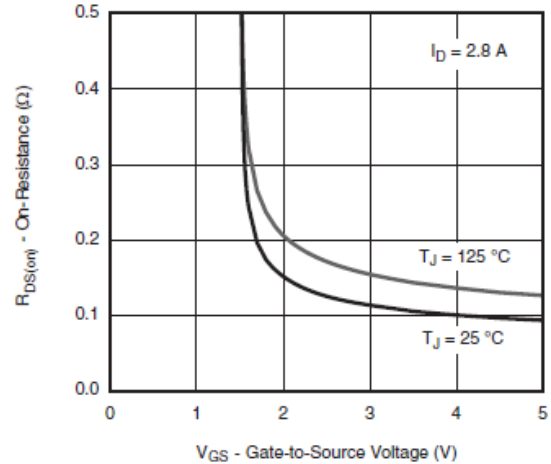


**On-Resistance vs. Gate-to-Source Voltage**

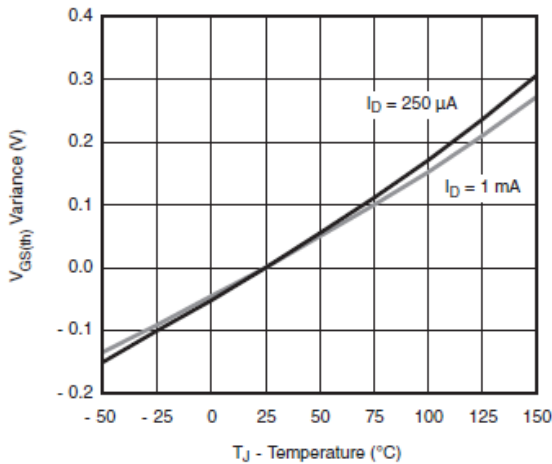

**Threshold Voltage**

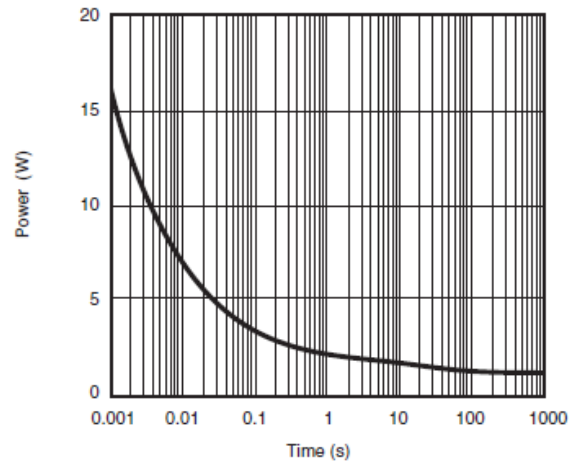



**Single Pulse Power, Junction-to-Ambient**

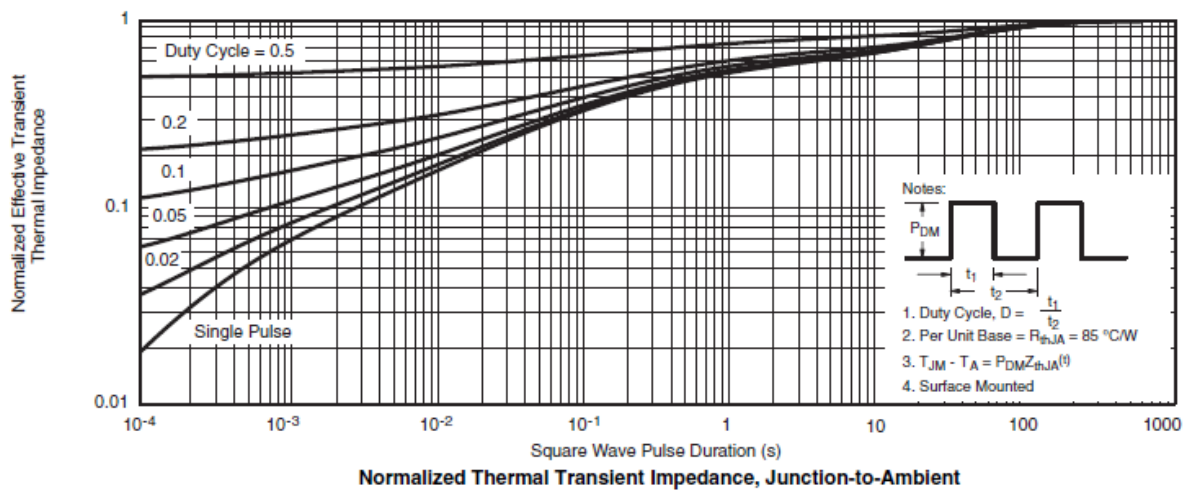





## Typical Characteristics ( P-Channel )



### Gate Charge Test Circuit & Waveform

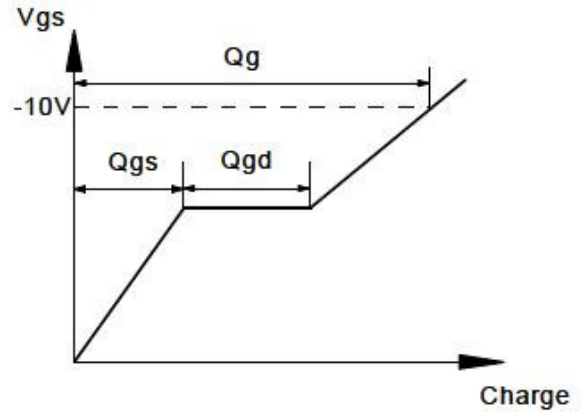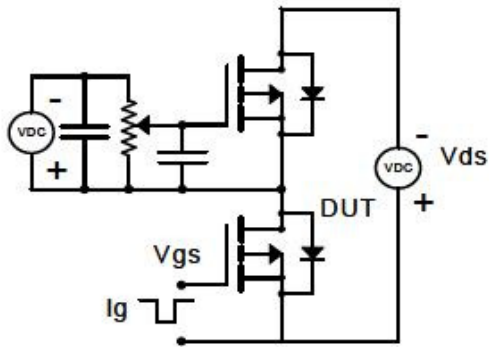

### Resistive Switching Test Circuit & Waveforms

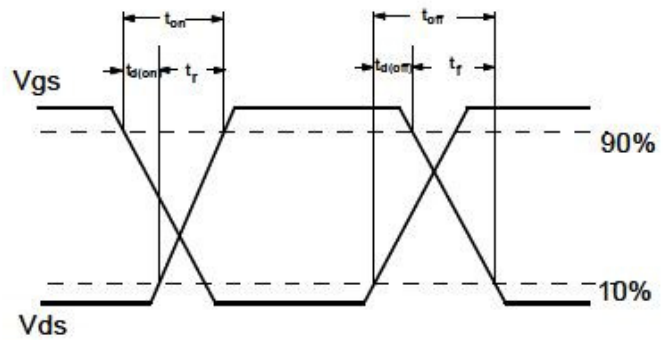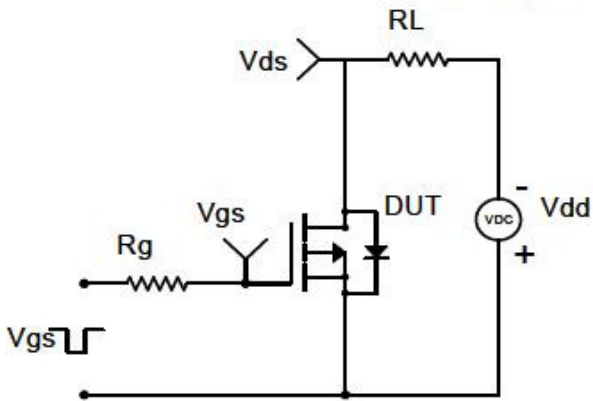


### Diode Recovery Test Circuit & Waveforms

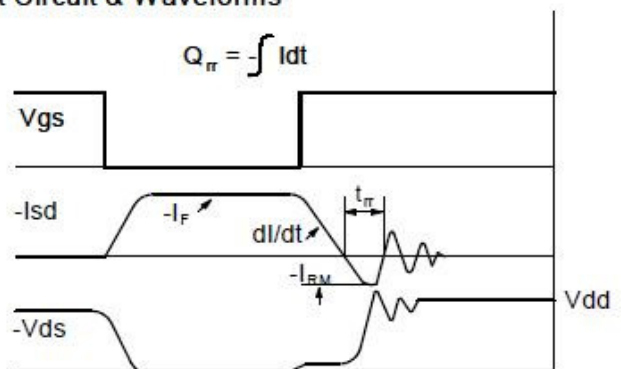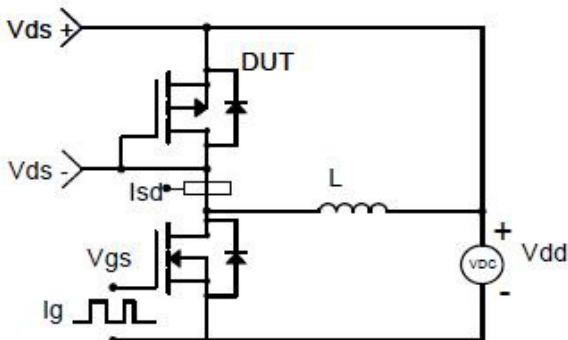





**Package Information ( DFN2X2-6L )**



**Top View**

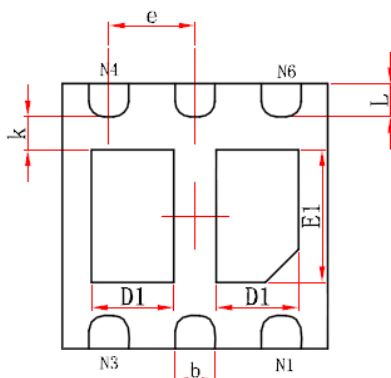

**Bottom View**

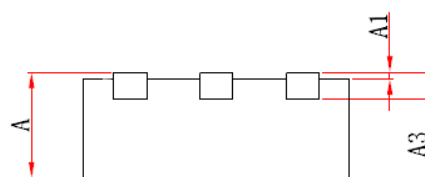

**Side View**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700/0.800	0.800/0.900	0.028/0.031	0.031/0.035
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.924	2.076	0.076	0.082
E	1.924	2.076	0.076	0.082
D1	0.520	0.720	0.020	0.028
E1	0.900	1.100	0.035	0.043
k	0.200MIN.		0.008MIN.	
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
L	0.174	0.326	0.007	0.013

©2010 Alfa-MOS Technology Corp.  
2F, No.80, Sec.1, Cheng Kung Rd., Nan Kang Dist., Taipei City 115, Taiwan (R.O.C.)  
Tel : 886 2) 2651 3928  
Fax : 886 2) 2786 8483  
©http://www.alfa-mos.com