



General Description




AFP8206, P-Channel enhancement mode MOSFET, uses Advanced Trench Technology to provide excellent $R_{DS(ON)}$, low gate charge.

These devices are particularly suited for low voltage power management, such as smart phone and notebook computer and other battery powered circuits, and low in-line power loss are needed in commercial industrial surface mount applications.

Features

- -20V/-4.5A, $R_{DS(ON)}=56m\Omega@V_{GS}=4.5V$
- -20V/-3.2A, $R_{DS(ON)}=70m\Omega@V_{GS}=2.5V$
- -20V/-2.8A, $R_{DS(ON)}=96m\Omega@V_{GS}=1.8V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- TSOP-6 package design

Pin Description (TSOP-6)

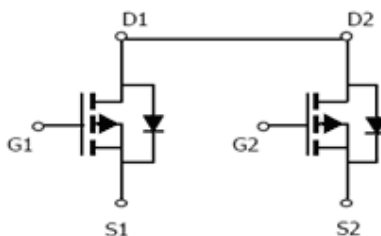

Application

- Load Switch
- Portable Equipment
- Battery Powered System

Pin Define

Pin	Symbol	Description
1	S1	Source
2	D1/D2	Drain
3	S2	Source
4	G2	Gate
5	D1/D2	Drain
6	G1	Source

Ordering Information

Part Ordering No.	Part Marking	Package	Unit	Quantity
AFP8206TS6RG	06YW	TSOP-6	Tape & Reel	3000 EA

- ※ 06 parts code
- ※ Y year code (0 ~ 9)
- ※ W week code (A ~ Z = 1 ~ 26 / a ~ z = 27 ~ 52)
- ※ AFP8206TS6RG : 7" Tape & Reel ; Pb- Free ; Halogen -Free



Absolute Maximum Ratings

(T_A=25°C Unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DSS}	-20	V
Gate-Source Voltage	V _{GSS}	±12	V
Continuous Drain Current(T _J =150°C)	I _D	T _A =25°C	-4.5
		T _A =70°C	2.8
Pulsed Drain Current	I _{DM}	-15	A
Continuous Source Current(Diode Conduction)	I _S	-1.6	A
Power Dissipation	P _D	T _A =25°C	2.0
		T _A =70°C	1.3
Operating Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-55/150	°C
Thermal Resistance-Junction to Ambient	R _{θJA}	120	°C/W


Electrical Characteristics

(T_A=25°C Unless otherwise noted)


Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =-250uA	-20			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250uA	-0.4		-0.8	
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-16V, V _{GS} =0V			-1	uA
		V _{DS} =-16V, V _{GS} =0V T _J =85°C			-10	
On-State Drain Current	I _{D(on)}	V _{DS} ≥ -5V, V _{GS} = -4.5V	-6			A
		V _{DS} ≥ -5V, V _{GS} = -2.5V	-4			
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = -4.5V, I _D = 4.5A		50	56	mΩ
		V _{GS} = -2.5V, I _D = -3.2A		60	70	
		V _{GS} = -1.8V, I _D = -2.8A		80	96	
Forward Transconductance	g _{FS}	V _{DS} = -5V, I _D = -3.6A		10		S
Diode Forward Voltage	V _{SD}	I _S = -1.6A, V _{GS} = 0V		-0.85	-1.2	V
Dynamic						
Total Gate Charge	Q _g	V _{DS} = -10V, V _{GS} = -4.5V I _D = -4.0A		8.0	12	nC
Gate-Source Charge	Q _{gs}			0.9		
Gate-Drain Charge	Q _{gd}			3.0		
Input Capacitance	C _{iss}	V _{DS} = -10V, V _{GS} = 0V f = 1MHz		780		pF
Output Capacitance	C _{oss}			115		
Reverse Transfer Capacitance	C _{rss}			55		
Turn-On Time	t _{d(on)}	V _{DD} = -10V, R _L = 2.3Ω I _D = -4.0A, V _{GEN} = -4.5V R _G = 1Ω		0.2	0.3	us
	t _r			1.0	1.5	
Turn-Off Time	t _{d(off)}			4.0	6.0	
	t _f			2.0	3.0	




Typical Characteristics

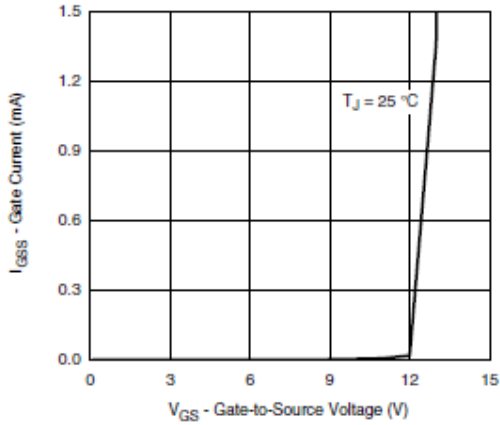


Gate Current vs. Gate-Source Voltage

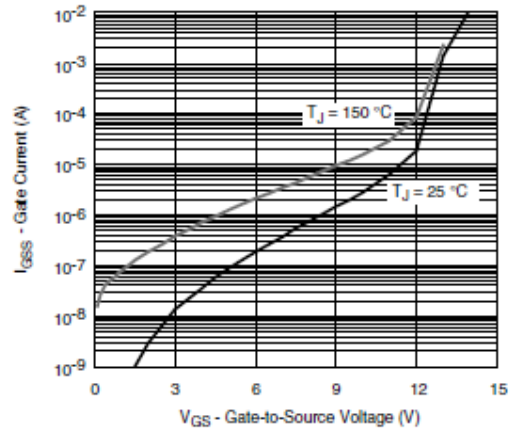


Gate Current vs. Gate-Source Voltage

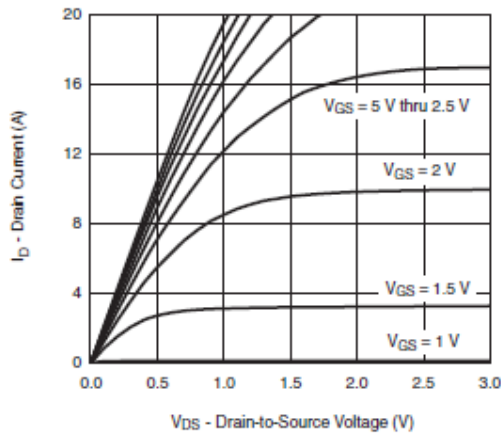


Output Characteristics

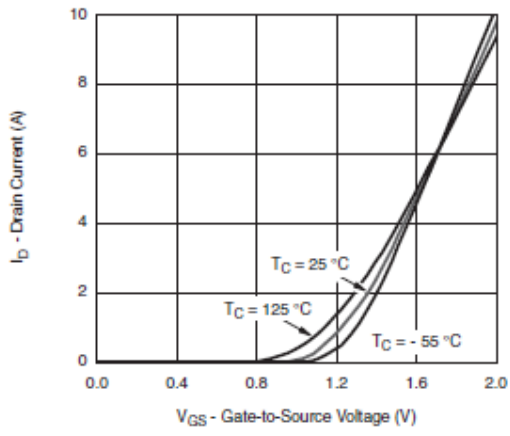

Transfer Characteristics

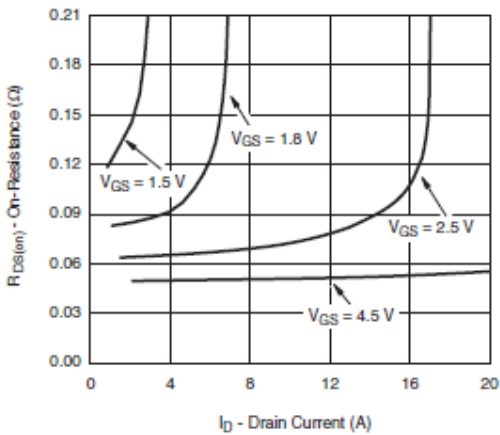


On-Resistance vs. Drain Current

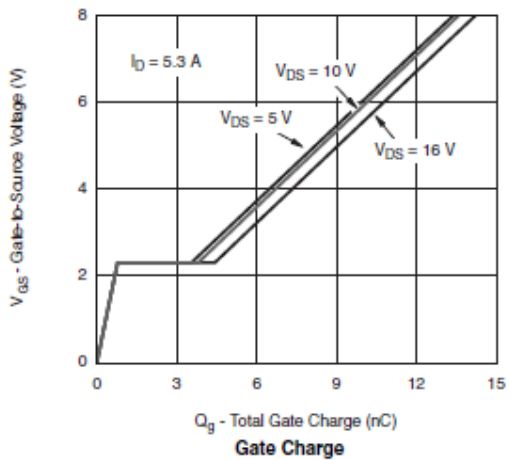


Gate Charge




Typical Characteristics

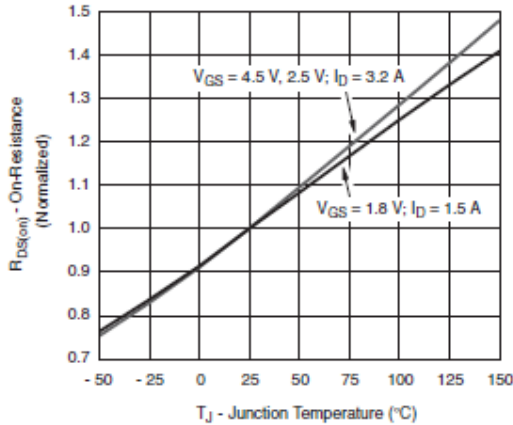


On-Resistance vs. Junction Temperature

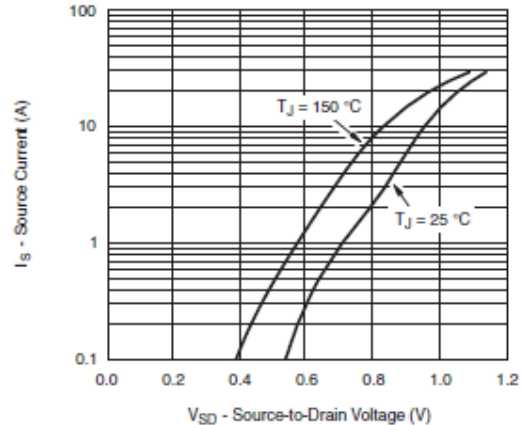


Source-Drain Diode Forward Voltage

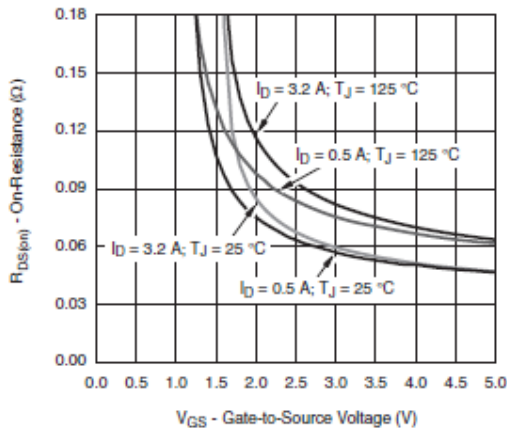


On-Resistance vs. Gate-to-Source Voltage

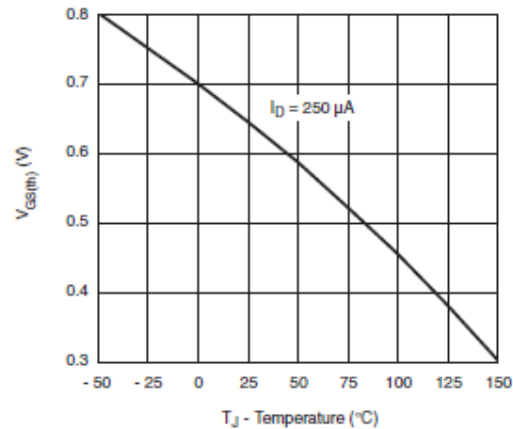

Threshold Voltage

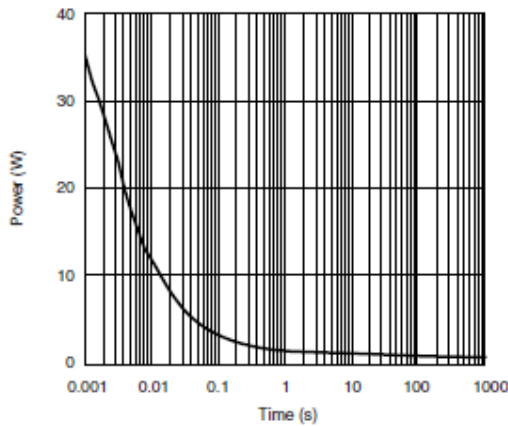

Single Pulse Power, Junction-to-Ambient


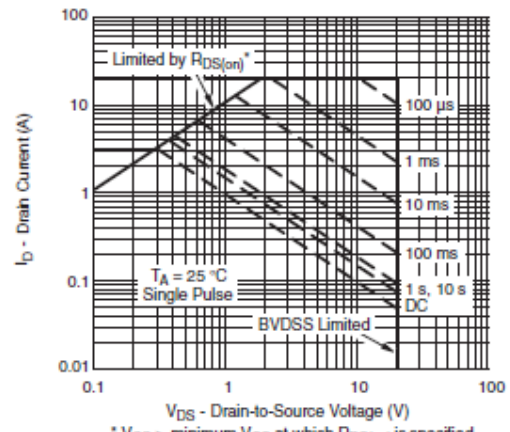


Safe Operating Area, Junction-to-Ambient





Typical Characteristics



Gate Charge Test Circuit & Waveform

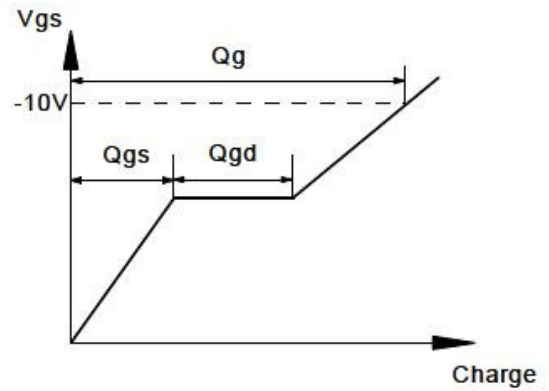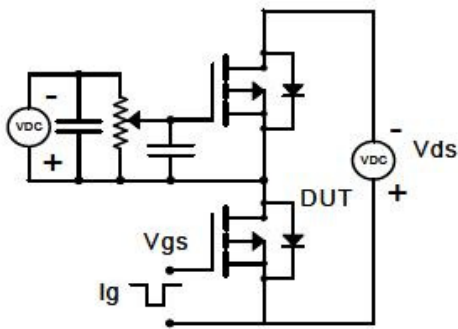

Resistive Switching Test Circuit & Waveforms

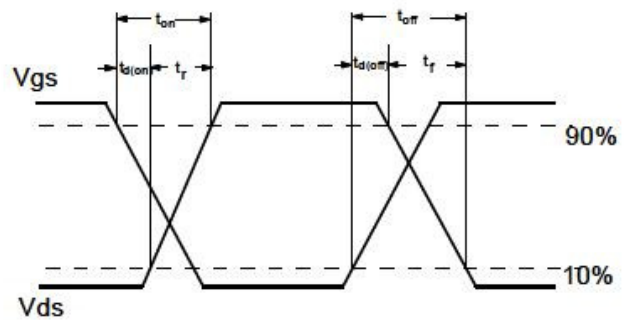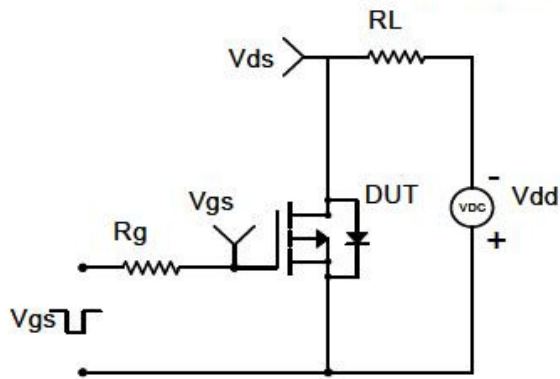


Diode Recovery Test Circuit & Waveforms

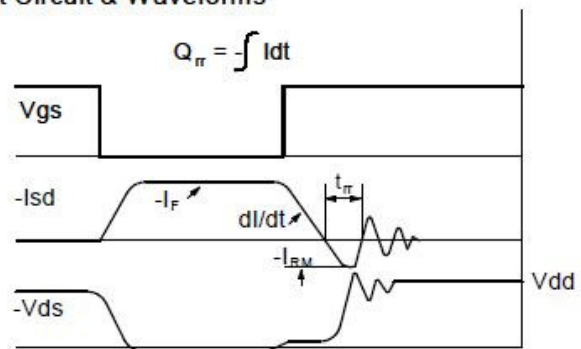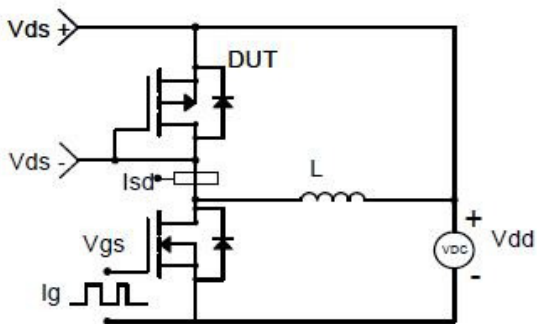



Package Information (TSOP-6)

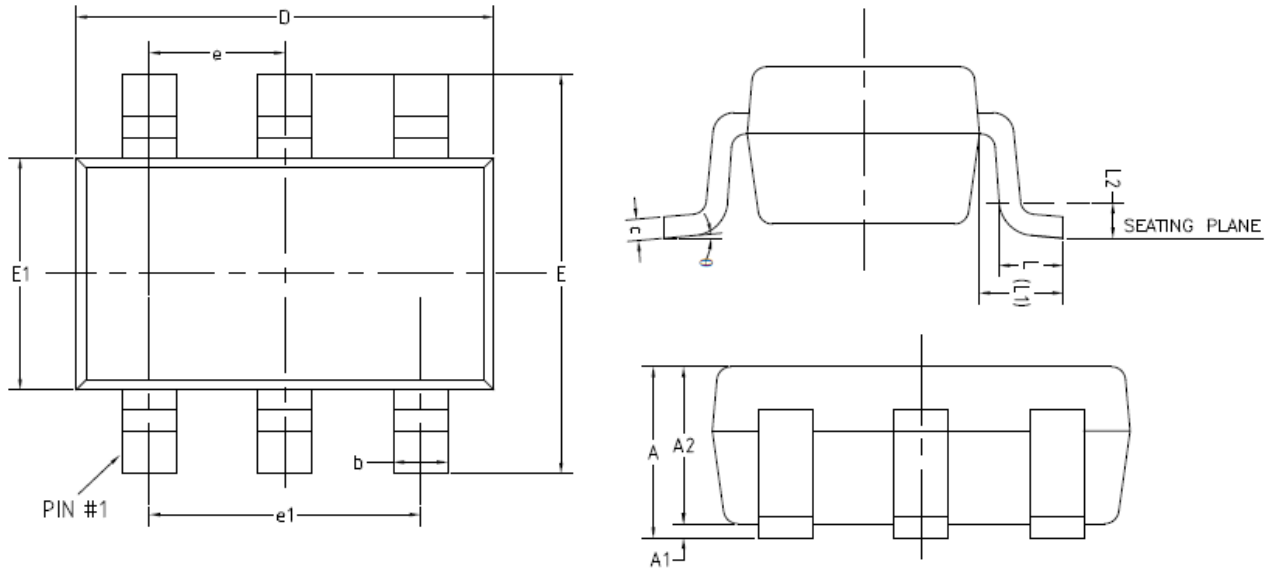

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.70	-	0.90
A1	0	-	0.10
A2	0.70	0.75	0.80
b	0.35	-	0.50
c	0.08	-	0.20
D	2.82	2.92	3.02
E	2.65	2.80	2.95
E1	1.60	1.65	1.70
e	0.95(BSC)		
e1	1.90(BSC)		
L	0.30	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
θ	0°	-	8°

©2010 Alfa-MOS Technology Corp.
 2F, No.80, Sec.1, Cheng Kung Rd., Nan Kang Dist., Taipei City 115, Taiwan (R.O.C.)
 Tel : 886 2) 2651 3928
 Fax : 886 2) 2786 8483
 ©http://www.alfa-mos.com